

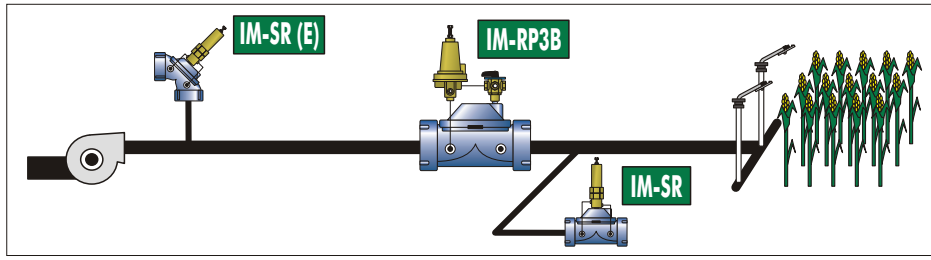
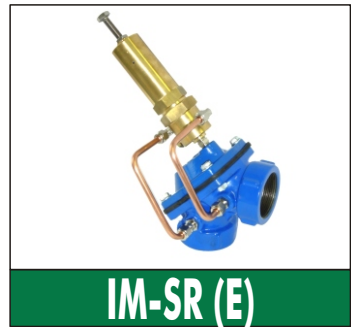


быстрый Сброс / Quick Relief / Alivio Rápido / Décharge Rapide

	Код	Ø		Евро	
		mm	Дюйм		
 THREADED TARAUDE' Нарезной ROSCADO	IMISR000001"M	25	1"		
	IMISR001"1/4M	32	1"¼		
	IMISR001"1/2M	40	1"½		
	IMISR000002"M	50	2"		
	IMISR00002"EM	50	2"		
	IMISR002"1/2M	65	2"½		
	IMISR00003"AM	80	3"		
	IMISR00003"CM	80	3"		
	IMISR00003"EM	80	3"		
	IMISR00003"FM	80	3"		
	IMISR00004"FM	100	4"		


	Код	Ø		Евро	
		mm	Дюйм		
 FLANGED BRIDES Фланцевый BRIDADO	IMISR0000050F	50	2"		
	IMISR0000065F	65	2"½		
	IMISR0000080F	80	3"		
	IMISR000080PF	80	3"		
	IMISR000080EF	80	3"		
	IMISR0000100F	100	4"		
	IMISR000100EF	100	4"		
	IMISR0000125F	125	5"		
	IMISR0000150F	150	6"		
	IMISR0000200F	200	8"		
	IMISR0000250F	250	10"		
	IMISR0000300F	300	12"		
	Ø 350-400-500 (14"-16"-20")				

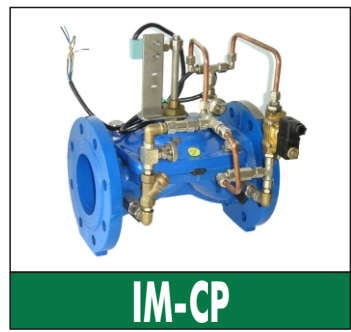


Стандарт 1,0 ÷ 10,0 bar
Дополнительно 1,5 ÷ 22,0 bar
PN25

Помповый контроль/ Pump Control / Control de Bomba / Contrôle de Pompe

	Код	Ø		Евро
		mm	Дюйм	


	Код	Ø		Евро	
		mm	Дюйм		
 FLANGED BRIDES Фланцевый BRIDADO	IMICP0000050F	50	2"		
	IMICP0000065F	65	2"½		
	IMICP0000080F	80	3"		
	IMICP000080PF	80	3"		
	IMICP000080EF	80	3"		
	IMICP0000100F	100	4"		
	IMICP000100EF	100	4"		
	IMICP0000125F	125	5"		
	IMICP0000150F	150	6"		
	IMICP0000200F	200	8"		
	IMICP0000250F	250	10"		
	IMICP0000300F	300	12"		
	Ø 350-400-500 (14"-16"-20")				




Стандарт 24V AC 50 ÷ 60 Hz N.C. PN16
Дополнительно 24-110-220V 50 ÷ 60 Hz N.O.

220V AC 50 ÷ 60 Hz N.C.
24-110-220V 50 ÷ 60 Hz N.O.

Контроль Альтиметром(высотометр) / Altimetric Control / Control Altimetrico / Contrôle Altimétrique

	Код	Ø		Евро	
		mm	Дюйм		
 THREADED TARAUDE' Нарезной ROSCADO	IMALT00001"M	25	1"		
	IMALT01"1/4M	32	1"¼		
	IMALT01"1/2M	40	1"½		
	IMALT00002"M	50	2"		
	IMALT0002"EM	50	2"		
	IMALT02"1/2M	65	2"½		
	IMALT0003"AM	80	3"		
	IMALT0003"CM	80	3"		
	IMALT0003"EM	80	3"		
	IMALT0003"FM	80	3"		
	IMALT0004"FM	100	4"		

	Код	Ø		Евро	
		mm	Дюйм		
 FLANGED BRIDES Фланцевый BRIDADO	IMALT000050F	50	2"		
	IMALT000065F	65	2"½		
	IMALT000080F	80	3"		
	IMALT00080PF	80	3"		
	IMALT00080EF	80	3"		
	IMALT000100F	100	4"		
	IMALT00100EF	100	4"		
	IMALT000125F	125	5"		
	IMALT000150F	150	6"		
	IMALT000200F	200	8"		
	IMALT000250F	250	10"		
	IMALT000300F	300	12"		
	Ø 350-400-500 (14"-16"-20")				



Стандарт PN16
Дополнительно 20 m.c.a. 30 m.c.a. 40 m.c.a.

Дополнительные функции / Additional Functions / Funciones Adicionales / Fonctions Supplémentaires



IM-ALT + EL-BI	Бистабильный Соленоид / Latch solenoid / Solenoide latch / Solenoide latch (9-12V DC PN10)	Евро
IM-ALT + EL-OT	3-х ходовой Латунный Соленоид / Brass 3-way solenoid / Solenoide de 3 vías latón / Solenoide 3 voies laiton	Евро
IM-ALT + EL-16	3-х ходовой Соленоид PN16 / PN16 3-way solenoid / Solenoide de 3 vías PN16 / Solenoide 3 voies PN16	Евро