

3-way Fluid Separation Latch Solenoid

Manual handle integrated

EL-BA model

Type: 3 way - 2 wire - Latch



Nominal Pressure : 10 bar

Voltage: Pulse 12-24V DC

Protection: Ip68

Temperature max: 60°C

Body: Reinforced Nylon

Diaphragm: EPDM


Hydraulic connections: 1/8"BSP

Minimum Section passage: Ø 2mm


Wire lenght: 50 cm

Wire outside dimension: Ø 2.4mm

Minimum needed Capacity of 4700µF or 80ms pulse lenght

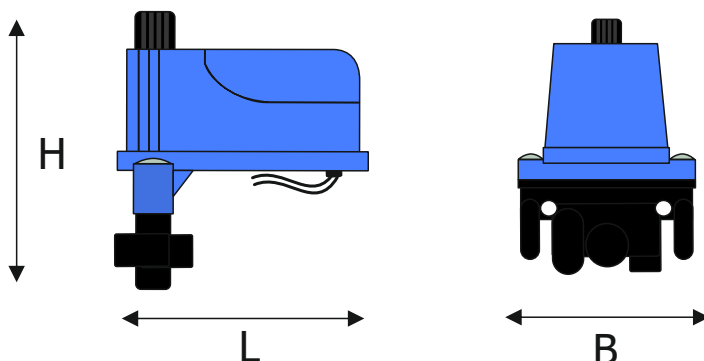

Connections

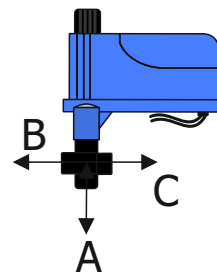

A: alimentation

B: discharge

C: common

L (mm)	B (mm)	H (mm)	Weight (g)
75	64	86	144