

Double Eccentric Butterfly Valve

Mod. FAR-DE

Characteristics


- Nominal Pressure: PN10/PN16
- Working Temperature: -10°C/+80°C
- Bidirectional Seal
- Internal and External Epoxy Coating
- Removable Sealing
- Low Operating Torque

Reference Normative

- Constructive: EN 593
- Flange Drilling: EN 1092-2
- Face to face: EN 558-1
- Test: EN 12266-1
- Coating: EN 30677
- Actuator Flange: ISO 5211

Optional

- Special Coating
- Flange drilling ANSI, BS
- PN25 version from DN100 to DN1400

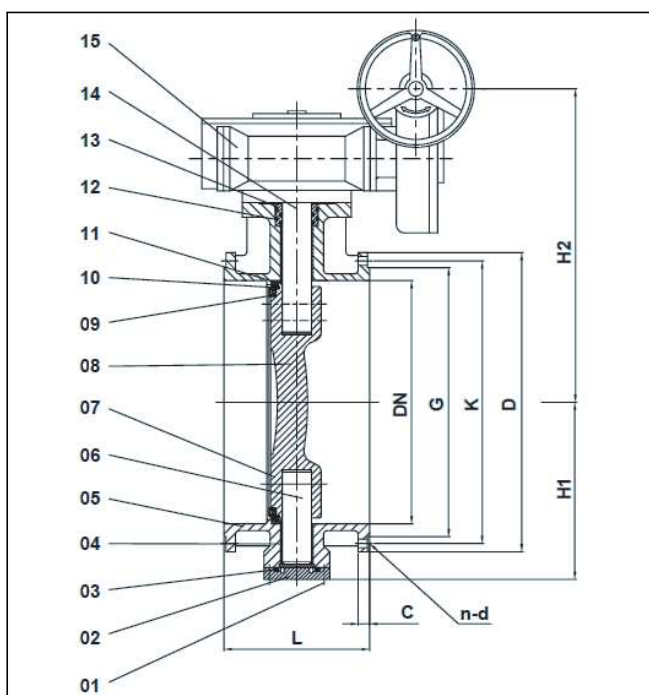

N	Description	Material	Standard
1	Bolts	Steel	-
2	Lower Cover	EN GJS 500-7	EN 1563
3	O-Ring	EPDM	EN 681
4	Bushing	Steel and PTFE	-
5	Body	EN GJS 500-7	EN 1563
6	Stem	Steel	EN 10088
7	Fixing Pin	Steel	EN 10088
8	Disc	EN GJS 500-7	EN 1563
9	Pressing Ring	EN GJS 500-7	EN 1563
10	Seal	EPDM	EN 681
11	Seat Ring	SS304	ASTM A276
12	Packing	EPDM	EN 681
13	Stuffing Box	BRONZE	EN 1982
14	Shaft	Stainless Steel	EN 10088
15	Manual Gearbox	-	-

Dimensions:

DN	PN 10					PN 16					L	H1	H2
	D	K	G	C	n-d	D	K	G	C	n-d			
100	220	180	156	19	8-19	220	180	156	19	8-19	190	118	172
150	285	240	211	19	8-23	285	240	211	19	8-23	210	156	241
200	340	295	266	20	8-23	340	295	266	20	12-23	230	193	266
250	395	350	319	22	12-23	405	355	319	22	12-28	250	223	301
300	445	400	370	24.5	12-23	460	410	370	24.5	12-28	270	252	331
350	505	460	429	24.5	16-23	520	470	429	26.5	16-28	290	288	365
400	565	515	480	24.5	16-28	580	525	480	28	16-31	310	320	398
450	615	565	530	25.5	20-28	640	585	548	30	20-31	330	343	440
500	670	620	582	26.5	20-28	715	650	609	31.5	20-34	350	370	535
600	780	725	682	30	20-31	840	770	720	36	20-37	390	435	531
700	895	840	794	32.5	24-31	910	840	794	39.5	24-37	430	495	604
800	1015	950	901	35	24-34	1025	950	901	43	24-41	470	570	664
900	1115	1050	1001	37.5	28-34	1125	1050	1001	46.5	28-41	510	640	733
1000	1230	1160	1112	40	28-37	1255	1170	1112	50	28-44	550	706	898
1200	1455	1380	1328	45	32-41	1485	1390	1328	57	32-50	630	845	1077
1400	1675	1590	1530	46	36-44	1685	1590	1530	60	36-50	710	960	1222
1600	1915	1820	1750	49	40-50	1930	1820	1750	65	40-57	790	1035	1357
1800	2115	2020	1950	52	44-50	2130	2020	1950	70	44-57	870	1198	1234
2000	2325	2230	2150	55	48-50	2345	2230	2150	75	48-62	950	1347	1360