

Single Function Air Valve Mod. SFI-SMPL

Technical Data

- Single effect air valve
- Single floater design
- Maximum working pressure: PN10/PN16
- Temperature range: +5°C/+45°C
- Suitable for potable water
- Internal and external fusion bonded epoxy coating

Normative Standards


- Design: EN 1074-4
- Flange: EN 1092-2
- Test: EN 12266-1
- Coating: EN 30677

Optional

- Special coating
- Flange drilling ANSI, BS
- Ball valve for maintenance
- Threaded connection

N	Description	Material	Standard
-	Body	EN GJS 500-7	EN 1563
-	Bonnet	EN GJS 500-7	EN 1563
-	Floater	PLASTIC	-
-	Flange	EN GJS 500-7	EN 1563
-	Orifice Cover	BRASS	EN 1982
-	Vent Orifice	BRASS	EN 1982
-	Maintenance ball valve	NICKEL PLATED BRASS	EN 1982

Dimensions and Weights:

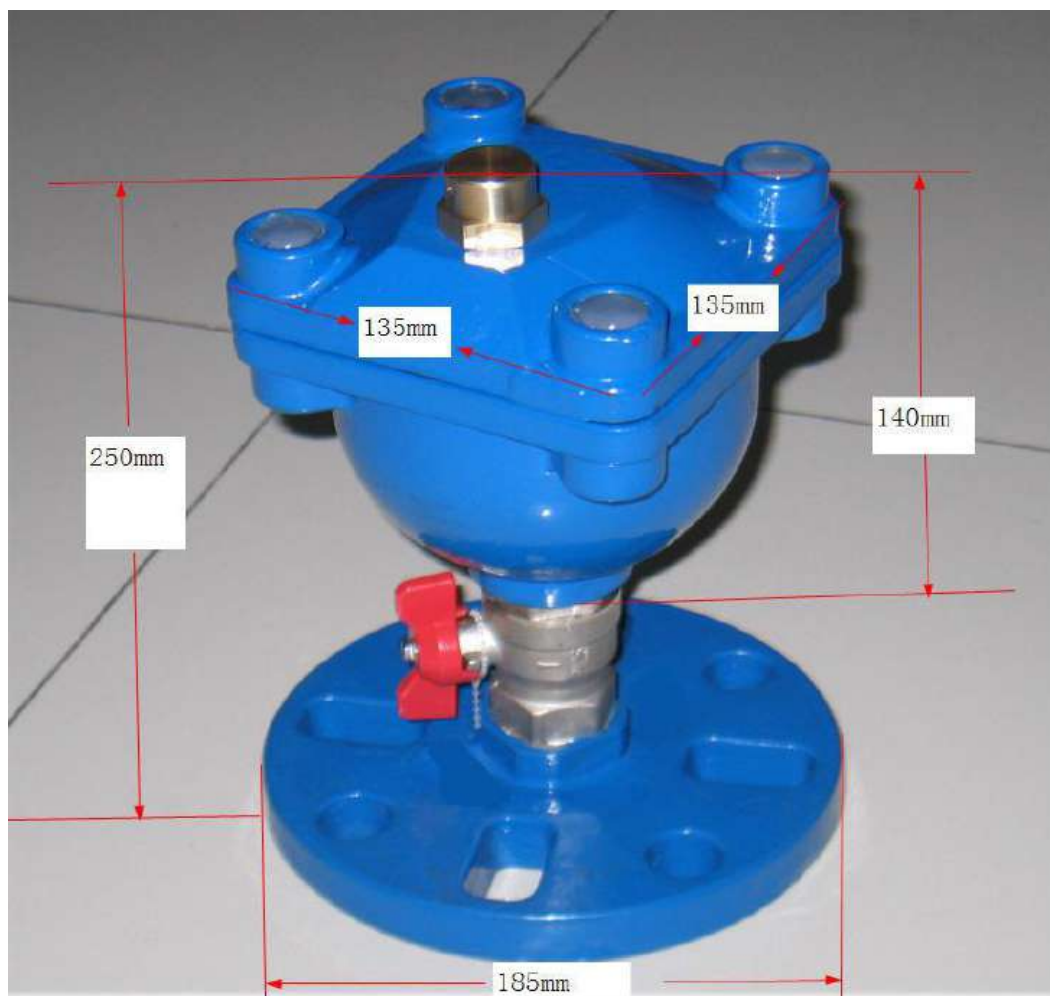

- Interchangeable flange DN40/DN50/DN60/DN65/DN80
- Weight: 5,20 kg